



DISPENSING Microfiltered water

Q2 TOP EASY

- Room temperature
- Cold

Q2 TOP BUBBLE

- Room temperature
- Cold
- Cold sparkling

BEST SOLUTION FOR

- Small Office
- Office
- 21-50 people
- No bottle
- Eco-friendly
- Dispenser


MODELS



White Glass



Black Glass



Alu Black



Base cabinet available

EASY

Q2TE2A11

Q2TE2B11

Q2TE2C11

BUBBLE

Q2TB2A11

Q2TB2B11

Q2TB2C11


Q2 TOP - DATA SHEET



Dimension (mm)	250 (W) x 464 (D) x 468 (H)
Technology	Ice bank
Ice bank	7 L capacity
Types of water	Ambient, chilled, sparkling, with portion control
Test conditions	20°C incoming water and 25°C room temperature
Performance	40 L per hour; 10 L continuously < 12°C
Boiler	Not available
Usage recommendation	Office and Horeca: 21-50 people
Carbonator	Stainless steel carbonator , 1 L capacity
Carbonation Pump	Membrane pump
Refrigeration gas	R290
Compressor	1/12 HP - 220/230 V 50 Hz
Thermostat	Mechanical
Condensation	Dynamic ventilation
Coils	6 mm stainless steel
Ø Water Inlet	8 mm
Ø CO2 Inlet	6 mm
Ø Fill Ice bank	8 mm
Water inlet pressure	Not over 3 bar - recommended reducer
CO2 inlet pressure	Ideal pressure: in between 3,5 - 4,5 bar
Finish	Housing skinplate, front glass or glazed aluminum
Power Supply	230 V - 50 Hz
Weight	21 Kg
Flow regulator	Included (into the unit)
Filtration	Not included
Water pressure reducers	Not included
CO2 pressure reducers	Not included

SIZE

Millimeters

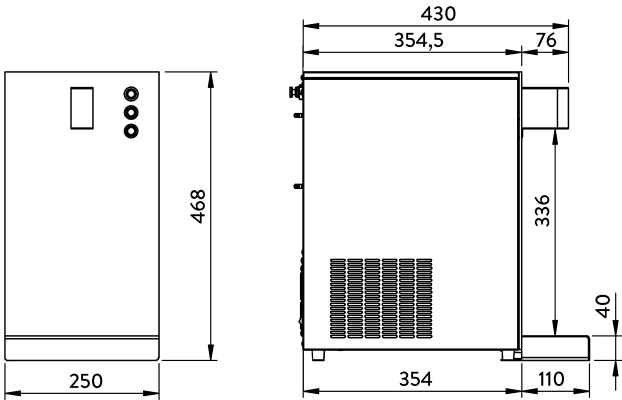

With cabinet
W 352 mm
D 552 mm
H 1475 mm