



DISPENSING Microfiltered water

Q1 TOP TOUCH CONTROL BUBBLE

- Room temperature
- Cold
- Cold sparkling

Q1 TOP TOUCH CONTROL ALL IN

- Room temperature
- Cold
- Cold sparkling
- Hot
- Warm safety

BEST SOLUTION FOR

- Home
- Small Office
- 1-20 people



MODEL



White Glass

Q1TB2ATC



Black Glass

Q1TB2BTC

Q1 TOP TC BUBBLE

Q1 TOP TC ALL IN

Q1TA2ATC

Q1TA2BTC

A clean surface with touch dispensing gives the Q1 Top with Touch Control an elegant, modern, and refined look, available in sparkling water and hot water versions.



Q1 TOP TOUCH CONTROL - DATA SHEET



Dimension (mm)	200 (W) x 484 (D) x 420 (H)
Technology	Ice bank
Ice bank	4,3 L capacity
Types of water	Ambient, chilled, sparkling, hot
Test conditions	20°C incoming water and 25°C room temperature
Performance	30 L per hour; 6 L continuously < 12°C
Boiler	0,5 L, 1200 W - temperature 98° C
Usage recommendation	Home, Small Office, bar: 1-20 people
Carbonator	Stainless steel carbonator , 0,5 L capacity
Carbonation Pump	Membrane pump
Refrigeration gas	R290
Compressor	1/12 HP - 220/230 V 50 Hz
Thermostat	Mechanical
Condensation	Dynamic ventilation
Coils	6 mm stainless steel
Ø Water Inlet	8 mm
Ø CO2 Inlet	6 mm
Ø Fill Ice bank	8 mm
Water inlet pressure	Not over 3 bar - recommended reducer
CO2 inlet pressure	Ideal pressure: in between 3,5 - 4,5 bar
Finish	Housing skinplate, front glass or glazed aluminum
Power Supply	230 V - 50 Hz
Weight	21 Kg
Flow regulator	Included (into the unit)
Filtration	Not included
Water pressure reducers	Not included
CO2 pressure reducers	Not included

SIZE

Millimeters

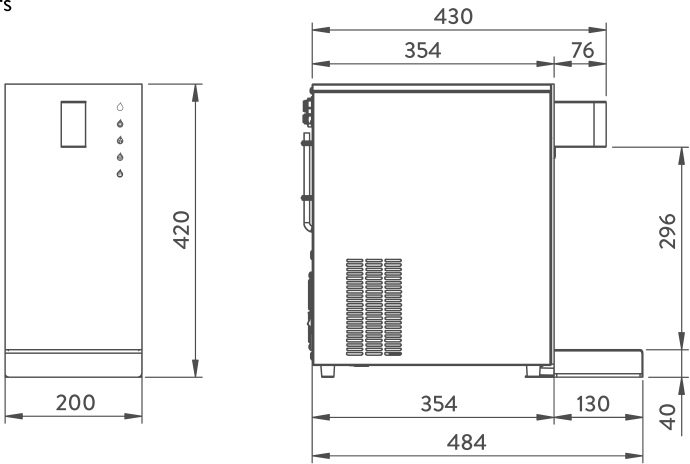

With cabinet
W 352 mm
D 552 mm
H 1.427 mm